



Remote Transmitter

860-22-REM5-1

Xwave² Features

- 64 Bi-directional Wireless Zones with constant supervision, battery and tamper monitoring
- Remote transmitter bi-directional communication
- Xwave² I/O module with two zones and one relay driven output
- Integrated Optex detectors
- IDS Wireless Door Mags

Specifications

Battery: CR1632 3V DC Lithium battery

Working Environment: -10°C to 50°C

Frequency: 869.52 MHz

Transmit Power: max. 14 dBm


Range: 200m Line of sight

Xwave² remote transmitters are not compatible with other IDS remote receivers

Remote Transmitter

Each remote transmitter has five buttons to control the alarm panel.

Figure 1: Remote transmitter default button assignment

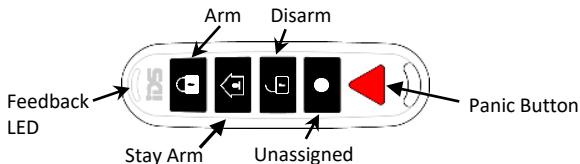

To configure the Xwave² remote transmitter please see **the Xwave² Wireless Hub Manual 700-564-01**